


Runde Schauglasplatten aus **Natron-Kalk-Glas nach DIN 8902** und **Borosilicatglas nach DIN 7080**

Round sight glasses made from **soda lime glass according to DIN 8902** and **borosilicate glass according to DIN 7080**

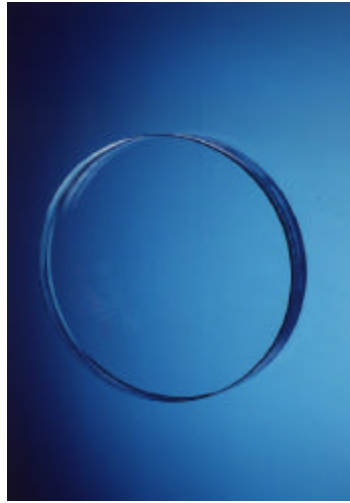

Qualitäten / Qualities

Natron-Kalk-Glas nach DIN 8902	Soda lime glass acc. to DIN 8902
Borosilicatglas nach DIN 7080	Borosilicate glass acc. to DIN 7080

Eigenschaften <i>Characteristics</i>	Druckbeanspruchung <i>Pressure resistance</i>	Temperaturbeanspruchung <i>Temperature resistance</i>
Natron-Kalk-Glas nach DIN 8902 <i>Soda lime glass acc. to DIN 8902</i>	ja <i>yes</i>	unbegrenzt - bis + 150 °C <i>unlimited - to + 150 °C</i>
Borosilicatglas nach DIN 7080 <i>Borosilicate glass acc. to DIN 7080</i>	ja <i>yes</i>	unbegrenzt - bis + 280 °C <i>unlimited - to + 280 °C</i>

Abmessungen / Dimensions

Durchmesser <i>Diameter</i>	Zulässiger Betriebsüberdruck in bar / <i>Allowed working pressure in bar</i>					
	8	10	16	25	40	50
Dicke / <i>Thickness</i>						
45	-	-	-	-	10	12
50	-	-	-	10	12	-
60	-	-	10	12	15	-
63	-	-	10	12	15	-
80	-	-	12	15	20	-
100	-	-	15	20	25	-
125	-	15	20	25	-	-
150	-	20	25	30	-	-
175	-	20	25	30	-	-
200	20	25	30	-	-	-
250	25	30	-	-	-	-